


# FVR 15T Spec Sheet (Imported Directly From Japan)

Features/Model			FVR34LM5	
Weight	GVW	kg	15,000	
	Chassis Weight	kg	5,160	
	Number of passengers		3	
Size	Overall Length	mm	7,955	
	Overall Width	mm	2,433	
	Overall Height	mm	2,810	
	WheelBase	mm	4,650	
	Track	(Front)	mm	1,990
		(Rear)	mm	1,855
Ground Clearance	mm	220		
Engine	Type	6HK1E5C Direct injection 4 cycle water cooler 6 cylinder(OHC) common rail diesel engine with turbo(VGS) and Intercooler , EGR , Catalyst and DPD		
	Displacement	c.c.	7,790	
	Max. Output	PS/rpm (Net)	260/2,400	
	Max. Torque	N-m/rpm (Net)	761 (≒ 77.6kg-m) /1,450	
	Compression ratio		17.5	
	Fuel Tank Capacity	L	200	
Transmission	Type	MLD6W Manual , 6 forward 1 reverse synchromesh transmission with power support		
	Gear Ratio	6.120 / 4.244 / 2.580 / 1.540 / 1.000 / 0.763 / R 6.525		
	Final Gear Ratio	6.143		
Clutch	Dry Single-Plate , Air Pressure support			
Performance	Max. Speed	km/h	100	
	Gradeability	tan θ%	35	
	Min. Turning Radius	m	7.7	
Suspension	Front / Rear	Half elliptic leaf spring with Hydraulic buffer / Half elliptic leaf spring		
Electric	Battery	V/AH	12/110*2	
	Generator	V/A	24/60	
Brake	Service Brake	Full Air , Dual Circuit , ABS with Automatic Brake Regulator		
	Type	Front Drum / Rear Drum		
	Auxiliary Brake	Exhaust Brake		
Tire	Front / Rear	11R22.5		
Others	Drive Cab	Convertible		
	Air Conditioner	Cold and Heat		

1.This catalog is for reference only , specifications in kind prevail . 2.TTM reserve the right to change specifications without prior notice .

	OAL	WB	FOH	ROH	CA	CE	AW	EH	HH
FVR34LM5	7,955	4,650	1,440	1,865	4,024	5,889	1,990	1,108	220

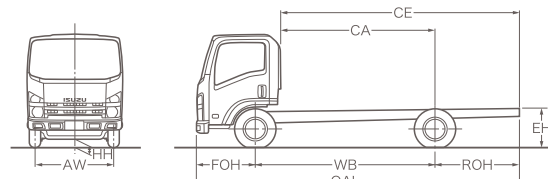

# FVR 17T Spec Sheet

Features/Model			FVR34LP5	FVR34LS5	FVR34LT5	
Weight	GVW	kg		17,000		
	Chassis Weight	kg	5,460	5,615	5,685	
	Number of passengers			3人		
Size	Overall Length	mm	8,505	10,005	10,740	
	Overall Width	mm		2,475		
	Overall Height	mm		2,805		
	WheelBase	mm	5,050	6,050	6,500	
	Track	(Front)	mm		1,990	
		(Rear)	mm		1,850	
Ground Clearance	mm		230			
Engine	Type	6HK1E5C Direct injection 4 cycle water cooler 6 cylinder(OHC) common rail diesel engine with turbo(VGS)and Intercooler , EGR , Catalyst and DPD				
	Displacement	c.c.	7,790			
	Max. Output	PS/rpm (Net)	260/2,400			
	Max. Torque	N-m/rpm (Net)	761 (≒ 77.6kg-m) /1,450-2,400			
	Compression ratio		16.5			
	Fuel Tank Capacity	L	200			
Transmission	Type	ZF9S1110 Manual , 9 forward 1 reverse synchromesh transmission with power support				
	Gear Ratio	L 9.479 / 6.576 / 4.678 / 3.478 / 2.617 / 1.890 / 1.345 / 1.000 / 0.752 / R 8.967				
	Final Gear Ratio	5.571				
Clutch	Dry Single-Plate , Air Pressure support					
Performance	Max. Speed	km/h	110			
	Gradeability	tan θ%	60			
	Min. Turning Radius	m	8.3	9.8	10.5	
Suspension	Front / Rear	Half elliptic leaf spring with Hydraulic buffer / Half elliptic leaf spring				
Electric	Battery	V/AH	12/110*2			
	Generator	V/A	24/60 (90A OPT)			
Brake	Service Brake	Full Air , Dual Circuit , ABS with Automatic Brake Regulator				
	Type	Front Drum / Rear Drum				
	Auxiliary Brake	Exhaust Brake				
Tire	Front / Rear	295/80R22.5				
Others	Drive Cab	Convertible				
	Air Conditioner	Cold and Heat				
	Steering	Power Steering				

1.This catalog is for reference only , specifications in kind prevail . 2.TTM reserve the right to change specifications without prior notice .

	OAL	WB	FOH	ROH	CA	CE	AW	EH	HH
FVR34LP5	8,505	5,050	1,440	2,015	4,424	6,439	1,990	1,088	230
FVR34LS5	10,005	6,050	1,440	2,515	5,424	7,939	1,990	1,088	230
FVR34LT5	10,740	6,500	1,440	2,800	5,874	8,674	1,990	1,088	230

