


FRR 11T Spec Sheet

Features/Model		FRR34LJ5	FRR34LL5	FRR34LN5	FRR34LQ5	
Weight	GVW kg	11,000				
	Chassis Weight kg	3,595	3,645	3,680	3,735	
	Number of passengers	3				
Size	Overall Length mm	6,555	7,255	8,155	9,155	
	Overall Width mm	2,195				
	Overall Height mm	2,565				
	WheelBase mm	3,790	4,360	4,860	5,560	
	Track	(Front) mm	1,795			
		(Rear) mm	1,660			
	Ground Clearance mm	166				
Engine	Type 6HK1E5NC	Direct injection 4 cycle water cooler 6 cylinder(OHC) common rail diesel engine with turbo(VGS) and Intercooler , EGR , Catalyst and DPD				
	Displacement c.c.	7,790				
	Max. Output PS/rpm (Net)	240 / 2,400				
	Max. Torque N-m/rpm (Net)	706 (≒ 72kg-m) / 1,450-2,400				
	Compression ratio	16.5				
	Fuel Tank Capacity L	200				
Transmission	Type MZW6P	Manual , 6 forward 1 reverse synchromesh transmission with power support				
	Gear Ratio	6.615 / 4.095 / 2.358 / 1.531 / 1.000 / 0.722 / R 6.615				
	Final Gear Ratio	4,875				
Clutch	Dry Single-Plate , Air Pressure support					
Performance	Max. Speed km/h	101				
	Gradeability tan θ %	45				
	Min. Turning Radius m	6.0	6.9	7.7	8.8	
Suspension	Front / Rear	Half elliptic leaf spring with Hydraulic buffer / Half elliptic leaf spring				
Electric	Battery V/AH	12 / 110*2				
	Generator V/A	24/60 (90A Optional)				
Brake	Service Brake	Full Air , Dual Circuit , ABS with Automatic Brake Regulator				
	Type	Front Drum / Rear Drum				
	Auxiliary Brake	Exhaust Brake				
Tire	Front / Rear	235 / 75R17.5				
Others	Drive Cab	Convertible				
	Air Conditioner	Cold and Heat				
	Steering	Power Steering				

1.This catalog is for reference only , specifications in kind prevail . 2.TTM reserve the right to change specifications without prior notice .

	OAL	WB	FOH	ROH	CA	CE	AW	EH	HH
FRR34LJ5	6,555	3,790	1,170	1,595	2,894	4,489	1,795	865	166
FRR34LL5	7,255	4,360	1,170	1,725	3,464	5,189	1,795	915	166
FRR34LN5	8,155	4,860	1,170	2,125	3,964	6,089	1,795	920	166
FRR34LQ5	9,155	5,560	1,170	2,425	4,664	7,089	1,795	920	166

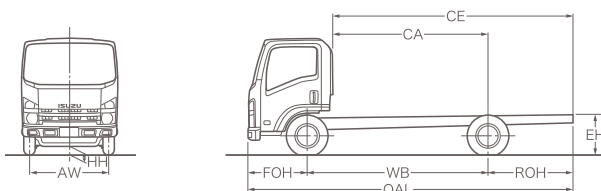

傾卸車車體參考圖